


Dry Freight CityMax Aluminum Specifications

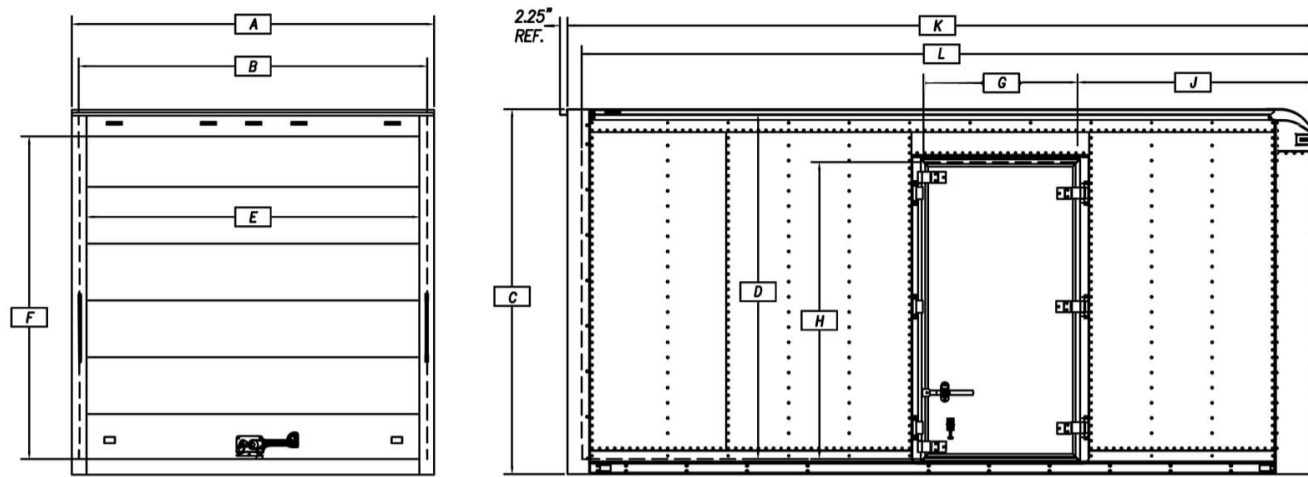

Dimensional Key

- A = Overall Width
- B = Interior Width (Includes 1/4" Plywood Liner)
- C = Exterior Height *
- D = Interior Height **
- E = Rear Door Opening Width
- F = Rear Door Opening Height
- G = Side Door Opening Width
- H = Standard Side Door Opening Height
- J = Leading Edge of Side Door to Inside
- K = Front of Body Exterior Length of Body ***
- L = Inside Front Panel to Inside Rear Door Panel ****

Body Model	Height & Width Dimensions				Rear Roll-Up or Swing Door Opening		Side Door Opening Single Panel	
	A	B	C *	D **	E	F	G	H
GPSD79	96	92-3/8	85-3/8	79-1/8	88	73-1/4	40-11/16	72-1/4
GPSD85	96	92-3/8	91-3/8	85-1/8	88	79-1/4	40-11/16	78-1/4
GPSD91	96	92-3/8	97-3/8	91-1/8	88	85-1/4	40-11/16	78-1/4

* Exterior height includes roof crown but does not include body longitudinals.

** Add 3/8" to exterior height for bodies with 3/4" floor. Subtract 5-5/8" from interior height at optional wheelboxes.

Body Length Dimensions

Nominal Length	10	12	14	15	16	17	18
K***	10' 5-5/8"	12' 5-5/8"	14' 5-5/8"	15' 5-5/8"	16' 5-5/8"	17' 5-5/8"	18' 5-5/8"
L****	10' 1"	12' 1"	14' 1"	15' 1"	16' 1"	17' 1"	18' 1"

***Exterior length is less rear light protector and bumper. If body does not have a liftgate or drop step bumper, add 2-1/4" to overall length to cover rear light protector. If body has 10" drop step bumper, add 7-1/2" to exterior length.

****Inside length is based on roll-up rear door and 3/8" FRP front end. If body has swing doors, add 1-1/2" to inside of rear frame post or 3" to door panel. If body includes recessed bulkhead, deduct 6" to inside of front end.

Calculated Weight Chart

Body Height	Body Length						
	10	12	14	15	16	17	18
79	1730	1909	2113	2208	2302	2397	2493
85	1772	1961	2159	2257	2354	2451	2548
91	1811	2002	2203	2307	2410	2508	---

Body Weight Includes: Base Body with 1-1/8" Laminate Hardwood Floor, O/H Rear Door, D.O.T. Underride, Mud Flaps, Lighting Per FMVSS 108, Mounting Kit, 1/4" Plywood liner on Sides, 3/8" FRP Front Panel. Weight Tolerance = 3%

Standard Side Door Locations

Body Length	10	12	14	15	16	17	18
J	30-7/32"			62-7/32"			

NOTES:

1. Foremost location of side door is 20-7/32" from inside front wall.
2. Door can be moved fore and aft of standard location on 2" increments only.
3. Door location does not include recessed bulkhead. Subtract 6" as required.

Note:

All Dimensions, Weights, And Measurements Specified Herein Are Subject To Morgan's Manufacturing Tolerances, May Change Without Notice, And May Vary Depending On Options Selected. Please Contact Morgan For Measurements For Your Particular Truck Body And Chassis Specifications.

